



# FK 110

## Diesel Generator




### GENERAL SPECIFICATIONS

|                |               |     |
|----------------|---------------|-----|
| Stand By Power | kVA           | 110 |
|                | kW            | 88  |
| Prime Power    | kVA           | 100 |
|                | kW            | 80  |
| Frequency      | Hz            | 50  |
| Cooling System | Water Cooling |     |

- 1) Standby power: The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage. Overloading isn't permissible.
- 2) Prime Power: The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

### DIMENSIONS & WEIGHT


#### WITH CANOPY

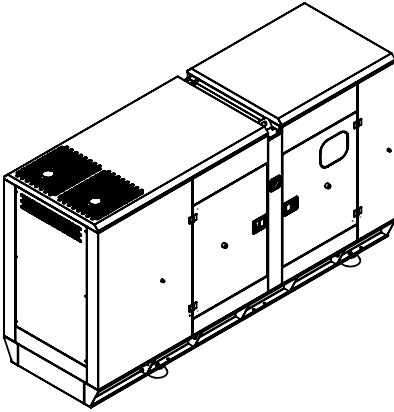

| Length<br>L (mm) | Width<br>W (mm) | Height<br>H (mm) | Weight<br>(Kg) | Fuel Tank<br>Capacity |
|------------------|-----------------|------------------|----------------|-----------------------|
| 2800             | 1000            | 1620             | 1320           | 195                   |

#### OPEN TYPE

| Length<br>L (mm) | Width<br>W (mm) | Height<br>H (mm) | Weight<br>(Kg) | Fuel Tank<br>Capacity |
|------------------|-----------------|------------------|----------------|-----------------------|
| 2350             | 1000            | 1810             | 1130           | 195                   |

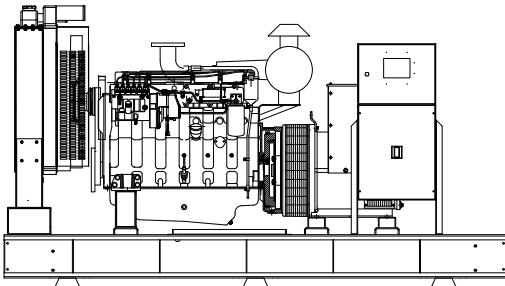

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.

☎ 0850 222 86 28

✉ [info@fullgenerator.com](mailto:info@fullgenerator.com)

▶ full generator

📷 full\_generator

📺 /fullgenerator

[www.fullgenerator.com](http://www.fullgenerator.com)

### ENGINE

| Engine                    | KOFO      |         |               |
|---------------------------|-----------|---------|---------------|
| Engine Model              |           |         | 4RT55-88D     |
| Number of Cylinders       |           |         | 4 Inline      |
| Injection System          |           |         | Direct        |
| Compression Ratio         |           |         | 17:1          |
| Bore                      |           | mm      | 110           |
| Stroke                    |           | mm      | 140           |
| Displacement              |           | lt      | 5.32          |
| Air Intake                |           |         | Turbocharged  |
| Speed (RPM)               |           | rpm     | 1500          |
| Oil Capacity              |           | lt      | 16            |
| Standby Power             |           | kW / hp | 97 / 130      |
| Prime Power               |           | kW / hp | 88 / 120      |
| Fuel Type                 |           |         | Euro Diesel   |
| Governor System           |           |         | Mechanical    |
| Cooling System            |           |         | Water Cooling |
| Coolant Capacity          |           | lt      | 23            |
| Fuel Consumption (lt / h) | Full Load |         | 22.5          |
|                           | %75 Load  |         | 17.7          |
|                           | %50 Load  |         | 12.2          |

### ALTERNATOR

|                     |  |     |      |
|---------------------|--|-----|------|
| Frequency           |  | Hz  | 50   |
| Voltage             |  | V   | 400  |
| Nb of Phases        |  |     | 3    |
| Voltage Regulation  |  |     | ±1%  |
| Insulation Class    |  |     | H    |
| Protection Standard |  |     | IP23 |
| Power Factor        |  | Cos | 0.8  |

### TECHNICAL SPECIFICATIONS

#### ENGINE

- KOFO heavy duty diesel engine
- 12V starter and charge alternator
- Replaceable air, fuel and oil filters
- Mechanical or electronic governor control
- Tropical type radiator
- Flexible fuel hose
- Oil drain valve and extension hose
- Industrial type silencer and steel compensator
- Maintenance-free starter battery
- Water jacket heater
- 1500 rpm engine speed

#### ALTERNATOR

- IP23 Protection Standard
- H Insulation Class
- 50 Hz Frequency
- 4 pole brushless synchronous type alternator
- Automatic Voltage Regulator (AVR)
- 400/230V AC Output Voltage - 1500 rpm

#### SOUND PROOF CANOPY AND CHASSIS

- Convenient design for easy lifting and carrying
- High standard sound proof canopy design
- Modular design with easily removable nuts - bolts
- Lockable doors
- Transparent window for watching Control Panel
- Electrostatic powder painted, providing protection against harsh weather conditions
- Emergency STOP button
- Fuel tank inside the chassis
- Anti-vibration wedges (engine - chassis and chassis - ground)

#### OPTIONAL

- Thermal magnetic CB (for automatic models)
- Super Silent Canopy
- Mobile Generator Sets
- Automatic fuel filling system
- Synchronization panel
- 3 Pole and 4 Pole ATS (Automatic Transfer Switch)
- Fuel Heater, Oil Heater
- External fuel tank and automatic fuel filling system
- Fuel - water separator filter
- Remote monitoring and control system



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.

### CONTROL PANEL

# D 300

## Web based Next Generation Controller



### SPECIFICATIONS

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB, RS-232 and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Easy USB firmware upgrade
- IP65 rating with optional gasket

### MEASUREMENTS

- Mains & genset PN/PP voltages
- Mains & genset frequency
- Mains & genset phase currents
- Mains & genset neutral currents
- Mains & genset, phase & total, kW, kVA, kVAR, pf
- Engine speed
- Battery voltage

### FUNCTIONALITIES

- AMF unit
- ATS unit
- Remote start controller
- Manual start controller
- Engine controller
- Remote display panel

### COMMUNICATION

- USB Device
- RS-232 (2400-57600baud)
- J1939-CANBUS
- Geo-locating through GSM
- GPS support (RS-232)
- Internet Central Monitoring
- SMS message sending
- E-mail sending
- Free PC software: Rainbow Plus
- Modbus RTU
- Modbus TCP/IP